


PLAT OF SURVEY



The East line of the NE 1/4 of Section 9 is assumed to bear N 00°15'54" E.

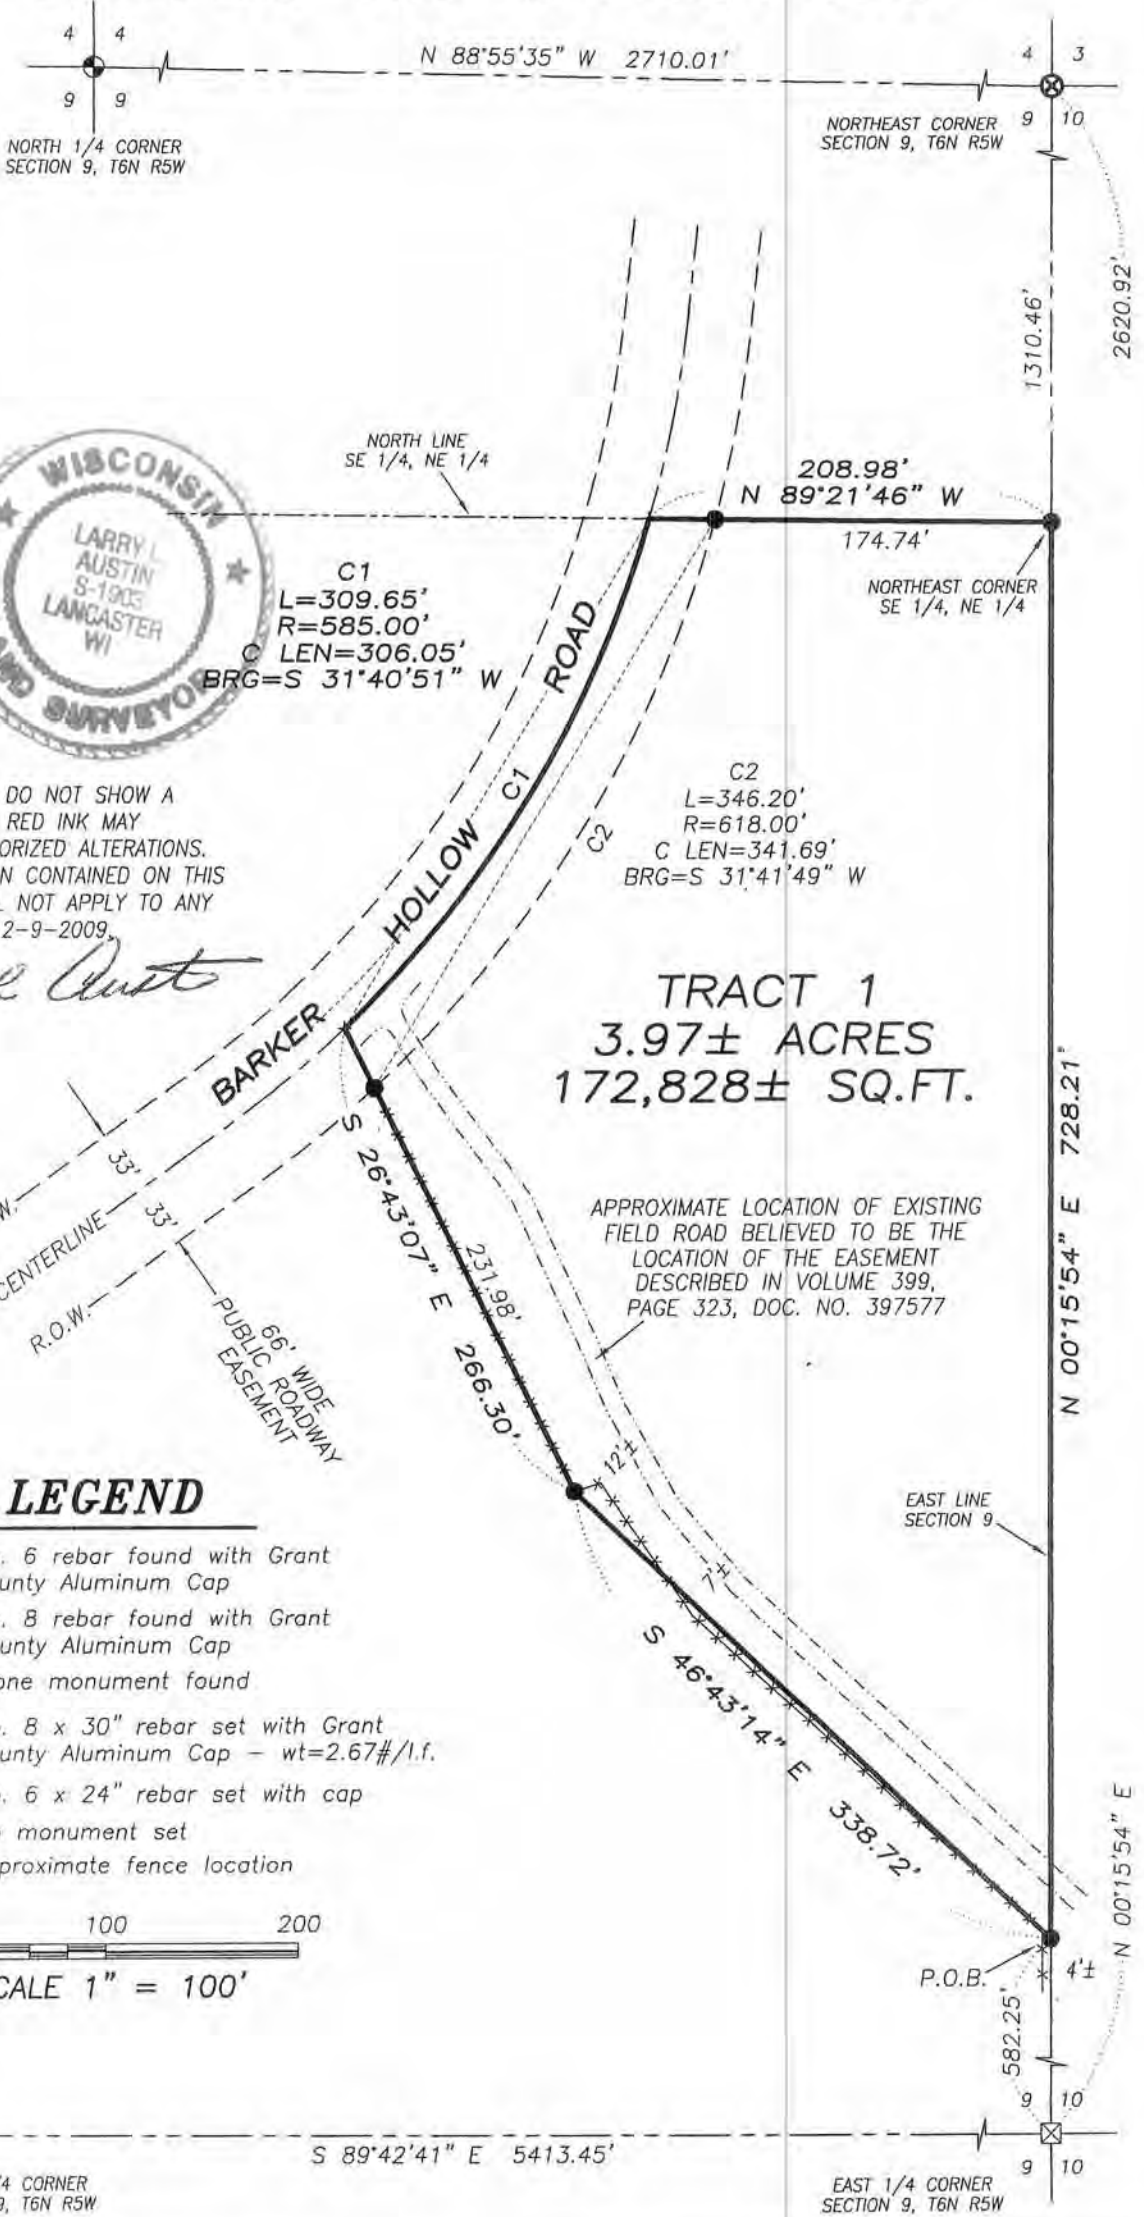

ALL PLANS THAT DO NOT SHOW A SEAL IMPRINT IN RED INK MAY CONTAIN UNAUTHORIZED ALTERATIONS. THE CERTIFICATION CONTAINED ON THIS DOCUMENT SHALL NOT APPLY TO ANY COPIES. DATED 12-9-2009.

Larry L. Austin



Austin Engineering LLC
austineengineeringllc.com

4211 HWY 81 E, LANCASTER, WI 53813
PHONE: 608-723-6363 FAX: 608-723-6702

Prepared for: WISCONSIN DEPT. OF NATURAL RESOURCES

JOB NO: 09s265
FIELDBOOK: TDS RANGER
G:\T6NR6W\18
H:\PLAT\T6NR5W\09\09s265-DNR

DRAWN BY: AJ AUSTIN
APPROVED: LL AUSTIN
CREW: BS-SB-BD

SHEET 1 OF 2

PLAT OF SURVEY

TRACT 1 DESCRIPTION:

Located in the Southeast Quarter (SE 1/4) of the Northeast Quarter (NE 1/4) of Section Nine (9), Township Six (6) North, Range Five (5) West of the 4th P.M., Town of Millville, Grant County, Wisconsin, containing 3.97 acres, more or less, and being described as follows:

Commencing at the East Quarter (E 1/4) corner of said Section 9;
thence North 00° 15' 54" East 582.25 feet along the East line of said Section 9 to the point of beginning;
thence North 00° 15' 54" East 728.21 feet along the East line of said Section to the Northeast corner of the Southeast Quarter (SE 1/4) of said Northeast Quarter (NE 1/4);
thence North 89° 21' 46" West 208.98 feet along the North line of the Southeast Quarter (SE 1/4) of said Northeast Quarter (NE 1/4) to a point in the centerline of a township road known as Barker Hollow Road;
thence 309.65 feet on the arc of a curve to the right having a radius of 585.00' and a long chord bearing South 31° 40' 51" West 306.05 feet along said centerline;
thence South 26° 43' 07" East 266.30 feet;
thence South 46° 43' 14" East 338.72 feet to the point of beginning.

SURVEYOR'S CERTIFICATE:

I, Larry L. Austin, Registered Wisconsin Land Surveyor, hereby certify:

That the above description was surveyed, mapped and monumented as shown on this plat by me or under my direct supervision.

That conformance with local ordinances are not guaranteed with this survey.


That this survey was prepared under the instructions of Sharene Smith, Bureau of Facilities and Lands of the Wisconsin Department of Natural Resources.

That to the best of my knowledge and belief, this plat is an accurate representation thereof.

That all plans that do not show a seal imprint in red ink may contain unauthorized alterations.

The certification contained on this document shall not apply to any copies.

Dated this 9th day of December, 2009.


Larry L. Austin, S-1903

SURVEYOR'S NOTES:

Surveyor has made no investigation for easements of record, encumbrances, restrictive covenants, ownership title evidence except as specifically shown on this plat. No distance should be assumed by scaling. No improvements have been located unless shown and noted. No representation as to ownership, use or possession should be hereon implied. Refer to abstract, title or local ordinances for any additional restriction, easements or building setback lines. No abstract, nor title commitment, nor results of title searches were furnished the surveyor.



Austin

Engineering LLC

austinengineeringllc.com

4211 HWY 81 E, LANCASTER, WI 53813
PHONE: 608-723-6363 FAX: 608-723-6702

Prepared for: WISCONSIN DEPT. OF NATURAL RESOURCES

JOB NO: 09s265
FIELDBOOK: TDS RANGER
G:\T6NR6W\18
H:\PLAT\T6NR5W\09\09s265-DNR

DRAWN BY: AJ AUSTIN
APPROVED: LL AUSTIN
CREW: BS-SB-BD

SHEET 2 OF 2